

APPLICABLE SPECIFICATIONS:

PROCUREMENT SPECIFICATION:
SPECIAL LUBE AND FINISH CODES:
INSTALLATION & INSPECTION SPECIFICATION:
PART NUMBER ASSIGNMENT:

MBF 2000.
MBF 2002.
MBF 2003.
MBF 2005.

TABLE I (CONT)

PART NUMBER	MINIMUM AVAILABLE GRIP DASH NO.	INSTALLED DIMENSIONS								MECHANICAL PROPERTIES									
		RECOMMENDED HOLE SIZE		J DIA. MIN.		K MAX.		BREAK-OFF LIMITS Δ 3		TENSILE STRUCTURAL FAILURE (MIN.)		DOUBLE SHEAR MIN.		LOCKING TORQUE MIN.		V GAGE PROT.		W GAGE DIA.	
		INCH	mm	INCH	mm	INCH	mm	INCH	mm	LBS.	N	LBS.	N	IN-LBS	Nm	INCH	mm	INCH	mm
MBF2122-5-()	-150	.168 .165	4,27 4,19	.250	6,35	.300	7,62	+.103 -.000	+2,62 -0,00	900	4000	3150	14010	1.0	0,113	.0207 .0174	0,526 0,442	.2832 .2830	7,193 7,188
MBF2122-6-()	-150	.202 .199	5,13 5,05	.300	7,62	.350	8,89	+.103 -.000	+2,62 -0,00	1400	6230	4600	20460	1.5	0,170	.0245 .0212	0,622 0,538	.3272 .3270	8,311 8,306
MBF2122-7-()	-150	.231 .228	5,88 5,79	.350	8,89	.400	10,16	+.103 -.000	+2,62 -0,00	1600	7120	6050	26910	2.0	0,226	.0358 .0324	0,909 0,823	.3315 .3313	8,420 8,415
MBF2122-8-()	-200	.263 .260	6,68 6,60	.400	10,16	.450	11,43	+.103 -.000	+2,62 -0,00	2100	9340	7900	35140	2.5	0,282	.0318 .0279	0,808 0,709	.4320 .4318	10,973 10,968
MBF2122-9-()	-200	.293 .290	7,44 7,37	.450	11,43	.500	12,70	+.103 -.000	+2,62 -0,00	2600	11565	9800	43590	3.0	0,339	.0446 .0407	1,133 1,034	.4320 .4318	10,973 10,968
MBF2122-10-()	-250	.315 .312	8,00 7,92	.475	12,06	.550	13,97	+.103 -.000	+2,62 -0,00	3600	16010	11350	50480	3.5	0,400	.0405 .0365	1,029 0,927	.5389 .5385	13,688 13,678
MBF2122-11-()	-250	.347 .344	8,81 8,74	.525	13,33	.575	14,60	+.103 -.000	+2,62 -0,00	4400	19570	13850	61600	4.0	0,452	.0539 .0500	1,369 1,270	.5389 .5385	13,688 13,678
MBF2122-12-()	-250	.378 .375	9,60 9,52	.575	14,60	.625	15,87	+.103 -.000	+2,62 -0,00	5000	22240	16450	73170	4.0	0,452	.0458 .0415	1,163 1,054	.6532 .6528	16,591 16,581

MATERIAL AND HEAT TREAT: NUT & SCREW:

A-286 STAINLESS STEEL PER CHEMICAL REQUIREMENTS OF AMS 5731, AMS 5732, AMS 5734 AND AMS 5737. HEAT TREATED AS REQUIRED FOR PERFORMANCE.

TABLE II

2ND DASH NO. (GRIP)	GRIP RANGE			
	MIN. GRIP		MAX. GRIP	
	INCH	mm	INCH	mm
100	.050	1,27	.100	2,54
150	.100	2,54	.150	3,81
200	.150	3,81	.200	5,08
250	.200	5,08	.250	6,35
300	.250	6,35	.300	7,62
350	.300	7,62	.350	8,89
400	.350	8,89	.400	10,16
450	.400	10,16	.450	11,43
500	.450	11,43	.500	12,70
550	.500	12,70	.550	13,97
600	.550	13,97	.600	15,24
650	.600	15,24	.650	16,51
700	.650	16,51	.700	17,78
750	.700	17,78	.750	19,05
800	.750	19,05	.800	20,32
850	.800	20,32	.850	21,59
900	.850	21,59	.900	22,86
950	.900	22,86	.950	24,13
1000	.950	24,13	1.000	25,40
1050	1.000	25,40	1.050	26,67
1100	1.050	26,67	1.100	27,94
1150	1.100	27,94	1.150	29,21
1200	1.150	29,21	1.200	30,48
1250	1.200	30,48	1.250	31,75
1300	1.250	31,75	1.300	33,02
1350	1.300	33,02	1.350	34,29
1400	1.350	34,29	1.400	35,56
1450	1.400	35,56	1.450	36,83
1500	1.450	36,83	1.500	38,10
1550	1.500	38,10	1.550	39,37
1600	1.550	39,37	1.600	40,64
1650	1.600	40,64	1.650	41,91
1700	1.650	41,91	1.700	43,18

SLEEVE:

304 STAINLESS STEEL PER AMS 5639, HEAT TREATED AS REQUIRED FOR PERFORMANCE.

INSERT:
DRIVE NUT:

ACETAL PER ASTM D4181.
MILD STEEL.

FINISH:

NUT, SLEEVE & SCREW :

PASSIVATE PER QQ-P-35. KAL-GARD ANN-RO #1013, CONVERSION COATING OPTIONAL. NONE.

INSERT:

CORROSION RESISTANT COATING COLOR BLACK.

DRIVE NUT:


LUBRICANTS:

DRY FILM LUBE PER MIL-L-46010 TYPE I OR EVERLUBE #812 PER MIL-L-81329, PARAFFIN WAX, OR CETYL ALCOHOL PER MIL-L-87132.

GENERAL NOTES:

1.) EXAMPLE OF PART NUMBER:

MBF 2122 - 6 - 200

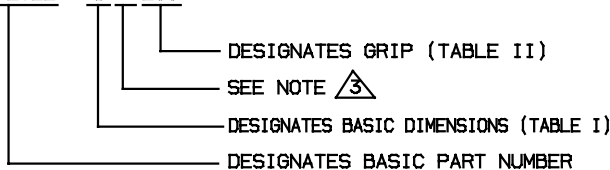

2.) LOCKING FEATURE CONSISTS OF THREE (3) INDENTATIONS LOCATED 120° APART ON THE PERIPHERY OF THE NUT COMPONENT AND APPROXIMATELY .040 ABOVE THE INTERSECTION OF THE NUT NOSE ANGLE AND O.D.

3. AN "L" IN PLACE OF THE DASH (-) BETWEEN THE DIAMETER DASH NUMBER AND THE GRIP DASH NUMBER DESIGNATES MODIFIED BREAK-OFF LIMITS OF +.053/-0.050. "e.g. MBF 2122()-6L200".

4. DISTORTION SHALL NOT PREVENT INSERTION OF THE FASTENER INTO A RING GAUGE OF LENGTH EQUAL TO ONE DIAMETER AND DIAMETER EQUAL TO MINIMUM RECOMMENDED HOLE. FORCE FOR INSERTION SHALL NOT EXCEED 5.0 POUNDS.

U.S. PATENT NO. 4747202, 4772167 AND 4967463
EUROPEAN PATENT NO. 0152531 & 0244783

MONOGRAM

CODE IDENT. NO.
98524

APPROVED DATE

ECN #3708
01-03-84

REV. LETTER & DATE

ECN # 3859
"V" 08-11-06

TITLE

BLIND FASTENER 100° FLUSH HEAD
FOR ADVANCED COMPOSITE MATERIAL
A-286 CRES

STANDARD

MBF 2122
SHEET 2 OF 2