


**Printed copies are for reference only.**

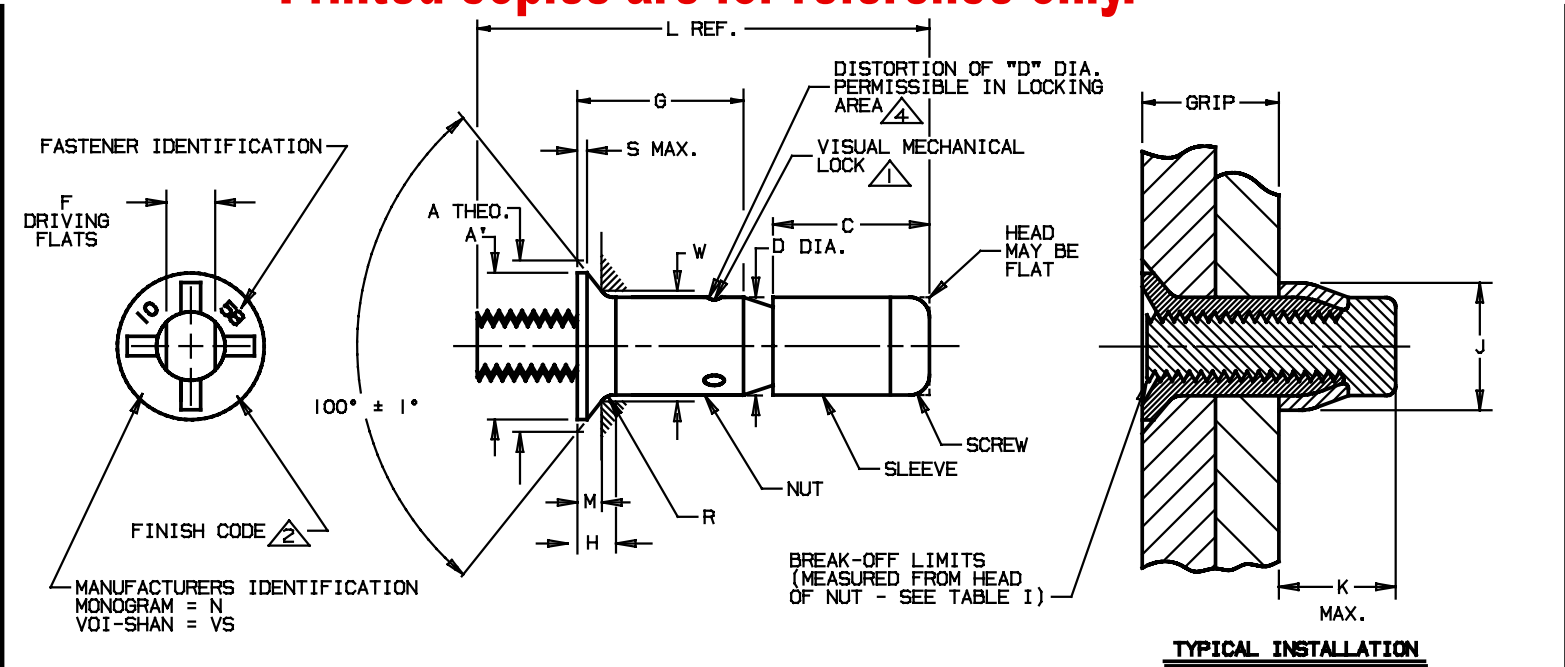

HEAD MARKINGS DEPRESSED .010 INCH ( 0,254 mm MAX.) (POSITION OPTIONAL)

TABLE I

PART NUMBER	NOM. DIA.		A DIA. THEO.		A' DIA. MIN.		C MAX.		D DIA.		F FLATS		H REF.		J DIA. MAX.		K MAX.		M GAGE PROT.		
	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	
PLT1058-5-()	.1635	4,153	.2612 .2564	6,63 6,51	.241	6,12	.285	7,24	.1645 .1625	4,178 4,128	.086 2,18 2,06	.040	1,02	.244	6,20	.257	6,53	.0265 .0237	0,673 0,602		
PLT1058-6-()	.1980	5,029	.3016 .2966	7,66 7,66	.270	6,86	.320	8,13	.1990 .1970	5,055 5,044	.104 2,64 2,51	.047	1,19	.300	7,62	.288	7,31	.0246 .0218	0,625 0,554		
PLT1058-8-()	.2590	6,579	.3948 .3898	10,03 9,90	.363	9,22	.355	9,02	.2600 .2580	6,604 6,553	.135 3,43 3,30	.061	1,55	.384	9,75	.320	8,13	.0271 .0241	0,688 0,615		
PLT1058-10-()	.3105	7,887	.4739 .4689	12,04 11,91	.442	11,23	.440	11,18	.3115 .3095	7,912 7,861	.152 3,86 3,73	.068	1,73	.427	10,85	.396	10,06	.0296 .0266	0,752 0,676		
PLT1058-12-()	.3735	9,487	.5604 .5554	14,23 14,11	.529	13,44	.525	13,34	.3745 .3725	9,512 9,462	.185 4,70 4,57	.078	1,96	.516	13,11	.473	12,01	.0321 .0290	0,815 0,737		

TABLE I (CONT.)

PART NUMBER	R RAD.		S MAX.		W GAGE DIA.		BREAK-OFF LIMITS		HOLE SIZE		PREVAILING TORQUE MIN.		DOUBLE SHEAR STRENGTH MIN.		TENSILE STRENGTH MIN.	
	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	IN-LBS	Nm	LBS.	N	LBS.	N
PLT1058-5-()	.030 .010	0,76 0,25	.010	0,25	.1992 .1990	5,060 5,055	+.088 -0,00	+2,23 -0,00	.168 .165	4,27 4,19	1.0	0,113	3150	14010	750	3340
PLT1058-6-()	.030 .015	0,76 0,38	.015	0,38	.2440 .2438	6,198 6,193	+.088 -0,00	+2,23 -0,00	.202 .199	5,13 5,05	1.5	0,170	4600	20460	1250	5560
PLT1058-8-()	.030 .015	0,76 0,38	.015	0,38	.3314 .3312	8,418 8,433	+.098 -0,00	+2,49 -0,00	.263 .260	6,68 6,60	2.5	0,282	7900	35140	1900	8450
PLT1058-10-()	.040 .020	1,02 0,51	.015	0,38	.4047 .4045	10,279 10,274	+.103 -0,00	+2,62 -0,00	.315 .312	8,00 7,92	3.5	0,400	11350	50480	3250	14460
PLT1058-12-()	.040 .020	1,02 0,51	.015	0,38	.4854 .4852	12,329 12,324	+.103 -0,00	+2,62 -0,00	.378 .375	9,60 9,52	4.0	0,452	16450	73170	5050	22460

**Fairchild**  
 CODE IDENT. NO.  
**92215**

U.S. PATENT NO. 4747202, 4772167 AND 4967463  
 EUROPEAN PATENT NO. 0152531 & 0244783

**MONOGRAM**  
 CODE IDENT. NO.  
**98524**

APPROVED DATE  
 SEPTEMBER 24, 1976

NOTICE: THIS DRAWING IS PART OF THE PROPRIETARY ARTICLE HEREIN DISCLOSED, OWNED BY MONOGRAM AEROSPACE FASTENERS, ANY PARTY BY ACCEPTING THIS DOCUMENT ASSUMES CUSTODY THEREOF AND AGREES: A. THE INFORMATION SET FORTH HEREIN IS GIVEN IN CONFIDENCE AND THIS DOCUMENT WILL NOT BE COPIED OR REPRODUCED IN WHOLE OR IN PART, NOR ITS CONTENTS REVEALED IN ANY MANNER TO ANY PERSON EXCEPT TO MEET THE PURPOSE FOR WHICH IT WAS DELIVERED. B. WITHOUT THE WRITTEN CONSENT OF MONOGRAM AEROSPACE FASTENERS, THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN UNDER NO CIRCUMSTANCES WILL BE USED IN THE MANUFACTURE OR REPRODUCTION OF THE ARTICLE DISCLOSED, AND DELIVERY OF THIS DOCUMENT SHALL NOT CONSTITUTE ANY RIGHT OR LICENSE TO DO SO.

TITLE  
 VISU-LOK, FASTENER, BLIND INTERNALLY THREADED, EXTERNAL SLEEVE TITANIUM  
 100° REDUCED FLUSH HEAD, SELF-LOCKING  
 75 KSI SHEAR

**STANDARD**  
**PLT1058**  
 SHEET 1 OF 2



TABLE II


SECOND DASH NUMBER	G GRIP (a) $\Delta$		GRIP RANGE $\Delta$				L REF.									
			MIN.		MAX.		-5		-6		-8		-10		-12	
	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm
-2	.156	3.96	.094	2.39	.156	3.96	.733	18.62	.853	22.67	.881	22.377	1.096	27.838	1.180	29.972
-3	.219	5.56	.157	3.99	.219	5.56	.795	20.19	.916	23.27	.944	23.978	1.158	29.413	1.242	31.547
-4	.281	7.14	.220	5.59	.281	7.14	.858	21.80	.978	24.84	1.006	25.557	1.158	29.413	1.242	31.547
-5	.344	8.74	.282	7.16	.344	8.74	.920	23.37	1.041	26.441	1.069	27.153	1.221	31.013	1.304	33.122
-6	.406	10.31	.345	8.76	.406	10.31	.983	24.97	1.103	28.016	1.131	28.727	1.283	32.588	1.367	34.722
-7	.469	11.91	.407	10.34	.469	11.91	1.045	26.543	1.166	29.616	1.194	30.328	1.346	34.188	1.429	36.230
-8	.531	13.49	.470	11.94	.531	13.49	1.108	28.143	1.228	31.191	1.256	31.902	1.408	35.763	1.492	36.897
-9	.594	15.11	.532	13.51	.594	15.11	1.170	29.718	1.291	32.791	1.319	33.503	1.471	37.363	1.554	39.472
-10	.656	16.66	.595	15.11	.656	16.66	1.233	31.318	1.353	34.366	1.381	35.077	1.533	38.938	1.617	41.072
-11	.719	18.26	.657	16.69	.719	18.26	1.295	32.893	1.416	35.966	1.444	36.678	1.596	40.538	1.679	42.647
-12	.781	19.84	.720	18.29	.781	19.84	1.358	34.493	1.478	37.541	1.506	38.252	1.658	42.113	1.742	44.247
-13	.844	21.44	.782	19.86	.844	21.44	1.420	36.068	1.541	39.141	1.569	39.853	1.721	43.713	1.804	45.822
-14	.906	23.01	.845	21.46	.906	23.01	1.483	37.668	1.603	40.716	1.631	41.427	1.783	45.288	1.867	47.422
-15	.969	24.61	.907	23.04	.969	24.61	1.545	39.243	1.666	42.316	1.694	43.028	1.846	46.868	1.929	48.997
-16	1.031	26.19	.970	24.64	1.031	26.19	1.608	40.843	1.728	43.891	1.756	44.602	1.908	48.463	1.992	50.597
-17	1.094	27.79	1.032	26.21	1.094	27.79			1.791	45.491	1.819	46.203	1.971	50.063	2.054	52.172
-18	1.156	29.36	1.095	27.81	1.156	29.36			1.853	47.066	1.881	47.777	2.033	51.638	2.117	53.772
-19	1.219	30.96	1.157	29.39	1.219	30.96			1.916	50.241	1.944	49.378	2.096	53.238	2.179	55.347
-20	1.281	32.54	1.220	30.99	1.281	32.54			1.978	51.841	2.006	50.952	2.158	54.813	2.242	56.947
-21	1.344	34.14	1.282	32.56	1.344	34.14			2.041	53.416	2.069	52.553	2.221	56.413	2.304	58.522
-22	1.406	35.71	1.345	34.16	1.406	35.71			2.103	55.016	2.131	54.127	2.283	57.988	2.367	60.122
-23	1.469	37.31	1.407	35.74	1.469	37.31			2.166	56.591	2.194	55.728	2.346	59.588	2.429	61.697
-24	1.531	38.89	1.470	37.34	1.531	38.89			2.228	58.191	2.256	57.302	2.408	61.163	2.492	63.297
-25	1.594	40.49	1.532	38.91	1.594	40.49			2.291	59.791	2.319	58.903	2.471	62.763	2.554	64.872
-26	1.656	42.06	1.595	40.51	1.656	42.06			2.353	61.366	2.381	60.477	2.533	64.338	2.617	66.472
-27	1.719	43.66	1.657	42.09	1.719	43.66			2.416	61.366	2.444	62.078	2.596	65.938	2.679	68.047
-28	1.781	45.24	1.720	43.69	1.781	45.24			2.478	62.941	2.506	63.652	2.658	67.513	2.742	69.647
-29	1.844	46.84	1.782	45.26	1.844	46.84			2.541	64.541	2.569	65.253	2.721	69.113	2.804	71.222
-30	1.906	48.41	1.845	46.86	1.906	48.41			2.603	66.116	2.631	66.827	2.783	70.688	2.867	72.822
-31	1.969	50.01	1.907	48.44	1.969	50.01			2.666	67.716	2.694	68.428	2.846	72.288	2.929	74.397
-32	2.031	51.59	1.970	50.04	2.031	51.59			2.728	69.291	2.756	70.002	2.908	73.863	2.992	75.997

(a) "G" TOLERANCES: FOR -5 & -6 SIZES  $+0.030$  ( $+0.762$ );  $-0.010$  ( $-0.254$ ); FOR -8 & -10 SIZES  $+0.040$  ( $+1.016$ );  $-0.010$  ( $-0.254$ ); FOR -12 SIZES  $+0.050$  ( $+1.270$ );  $-0.010$  ( $-0.254$ )

PROCUREMENT SPECIFICATION: ESCBB-9 CLASS I  
 MATERIAL: NUT & SCREW: 6A1-4V TITANIUM PER AMS 4928 OR AMS 4967  
 SLEEVE: CORROSION RESISTANT STEEL  
 HEAT TREAT: NUT & SCREW: HEAT TREAT PER MIL-H-81200  
 MAX. HYDROGEN 125 PPM AS REQUIRED FOR PERFORMANCE  
 SLEEVE:  
 FINISH: (-) NUT & SCREW: NONE  
 $\Delta$  SLEEVE: PASSIVATE PER QQ-P-35 (MIL-S-5002) AND DRY FILM LUBE  
 L NUT: ALUMINUM COAT PER NAS 4006  
 SLEEVE: PASSIVATE PER QQ-P-35 (MIL-S-5002) AND ALUMINUM COAT PER NAS 4006  
 SCREW: NONE  
 S NUT: PHOSPHATE FLUORIDE PER BOEING SPECIFICATION BAC 5861. DRY FILM LUBRICANTS PROHIBITED  
 SCREW: STANDARD LUBRICATION  
 SLEEVE: PASSIVATE PER QQ-P-35 (MIL-S-5002) AND STANDARD LUBRICATION  
 LUBRICATION: LUBRICANTS LISTED BELOW MAY BE APPLIED TO ANY OR ALL COMPONENTS IF REQUIRED FOR PERFORMANCE, UNLESS OTHERWISE SPECIFIED BY FINISH CODE. DRY FILM LUBE PER MIL-L-46010 TYPE I OR EVERLUBE 812 PER MIL-L-81329, CETYL ALCOHOL PER MIL-L-87132, OR PARAFFIN WAX.

GENERAL NOTES:

1. LOCKING FEATURE CONSISTS OF THREE (3) INDENTATIONS LOCATED 120° APART ON THE PERIPHERY OF THE NUT COMPONENT
2. STANDARD FINISHES AND LUBRICANTS AS SHOWN ON LEFT. REFER TO SPECIFICATION ESCBB-4 FOR SPECIAL FINISHES AND/OR LUBRICANTS, IF REQUIRED
3. HALF-GRIP SIZES MAY BE ORDERED BY ADDING (.5) TO THE GRIP DASH NUMBERS  
 EXAMPLE: PLT1058-6-4.5 INDICATES A NOMINAL GRIP LENGTH OF 4.5 16THS (.281" = 7.14mm) THE GRIP RANGE FOR THESE HALF GRIP SIZES WILL BE NOMINAL GRIP  $+0.031/-0.030$  ( $+0.78/-0.78$  mm) THE BASIC "G" DIMENSION WILL BE MAXIMUM GRIP  $\pm 0.031$  ( $\pm 0.78$  mm) AND THE OVERALL SCREW LENGTH "L" DIMENSION MAY VARY AT THE MANUFACTURER'S OPTION
4. DISTORTION OF "D" DIAMETER SHALL NOT PREVENT INSERTION OF THE FASTENER INTO A RING GAUGE OF LENGTH EQUAL TO ONE DIAMETER AND DIAMETER EQUAL TO MAXIMUM "D"  $+0.01$ ". FORCE FOR INSERTION SHALL NOT EXCEED FIVE (5) POUNDS (22.23 NEWTONS)
- 5.) OUTSIDE DIAMETER OF HEAD OF SCREW AND OUTSIDE DIAMETER OF SLEEVE SHALL NOT BE GREATER THAN MAXIMUM "D" DIAMETER.
- 6.) CONCENTRICITY OF NUT HEAD CONICAL SURFACE TO "D" DIAMETER SHALL BE WITHIN .005 T.I.R. (EXCEPT OVER INDENTS).
- 7.) REMOVE ALL LOOSE OR HANGING BURRS.
8. STANDARD GRIP LENGTHS ARE SHOWN IN TABLE II. SHORTER OR LONGER GRIPS THAN THOSE LISTED MAY BE AVAILABLE AS SPECIALS. ON GRIP LENGTHS SHORTER THAN THOSE LISTED, THE BREAKOFF LIMITS AND PREVAILING TORQUES SHOWN IN TABLE I DO NOT APPLY.
9. DIMENSIONS "A", "A'" AND "H" ARE FOR ENGINEERING REFERENCE PURPOSES ONLY AND ARE NOT TO BE USED FOR INSPECTION PURPOSES. THESE DIMENSIONS ARE THEORETICAL VALUES DERIVED FROM "D", "S", "M", "W" AND HEAD ANGLE DIMENSIONS.
10. DIMENSIONS ARE EXCLUSIVE OF LUBRICATION.

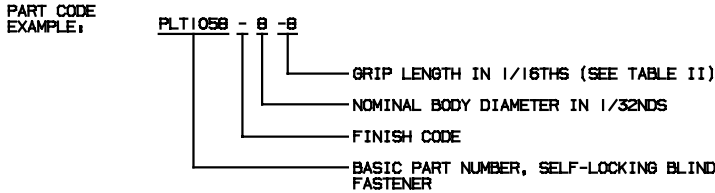

**Fairchild**  
 CODE IDENT. NO.  
**92215**

U.S. PATENT NO. 4747202, 4772167 AND 4967463  
 EUROPEAN PATENT NO. 0152531 & 0244783

**MONOGRAM**  
 CODE IDENT. NO.  
**98524**

APPROVED DATE  
 SEPTEMBER 24, 1976

NOTICE: THIS DRAWING IS PART OF THE PROPRIETARY ARTICLE HEREIN DISCLOSED, OWNED BY MONOGRAM AEROSPACE FASTENERS. ANY PARTY BY ACCEPTING THIS DOCUMENT ASSUMES CUSTODY THEREOF AND AGREES: A. THE INFORMATION SET FORTH HEREIN IS GIVEN IN CONFIDENCE AND THIS DOCUMENT WILL NOT BE COPIED OR REPRODUCED IN WHOLE OR IN PART, NOR ITS CONTENTS REVEALED IN ANY MANNER TO ANY PERSON EXCEPT TO MEET THE PURPOSE FOR WHICH IT WAS DELIVERED. B. WITHOUT THE WRITTEN CONSENT OF MONOGRAM AEROSPACE FASTENERS, THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN UNDER NO CIRCUMSTANCES WILL BE USED IN THE MANUFACTURE OR REPRODUCTION OF THE ARTICLE DISCLOSED, AND DELIVERY OF THIS DOCUMENT SHALL NOT CONSTITUTE ANY RIGHT OR LICENSE TO DO SO.

TITLE  
 VISU-LOK, FASTENER, BLIND INTERNALLY THREADED, EXTERNAL SLEEVE TITANIUM 100° REDUCED FLUSH HEAD, SELF-LOCKING 75 KSI SHEAR

**STANDARD**  
 PLT1058  
 SHEET 2 OF 2