




CUSTODIAN: ENGINEERING STANDARD COMMITTEE FOR BLIND BOLTS  
 3423 SOUTH GARFIELD AVENUE  
 LOS ANGELES, CALIFORNIA 90040

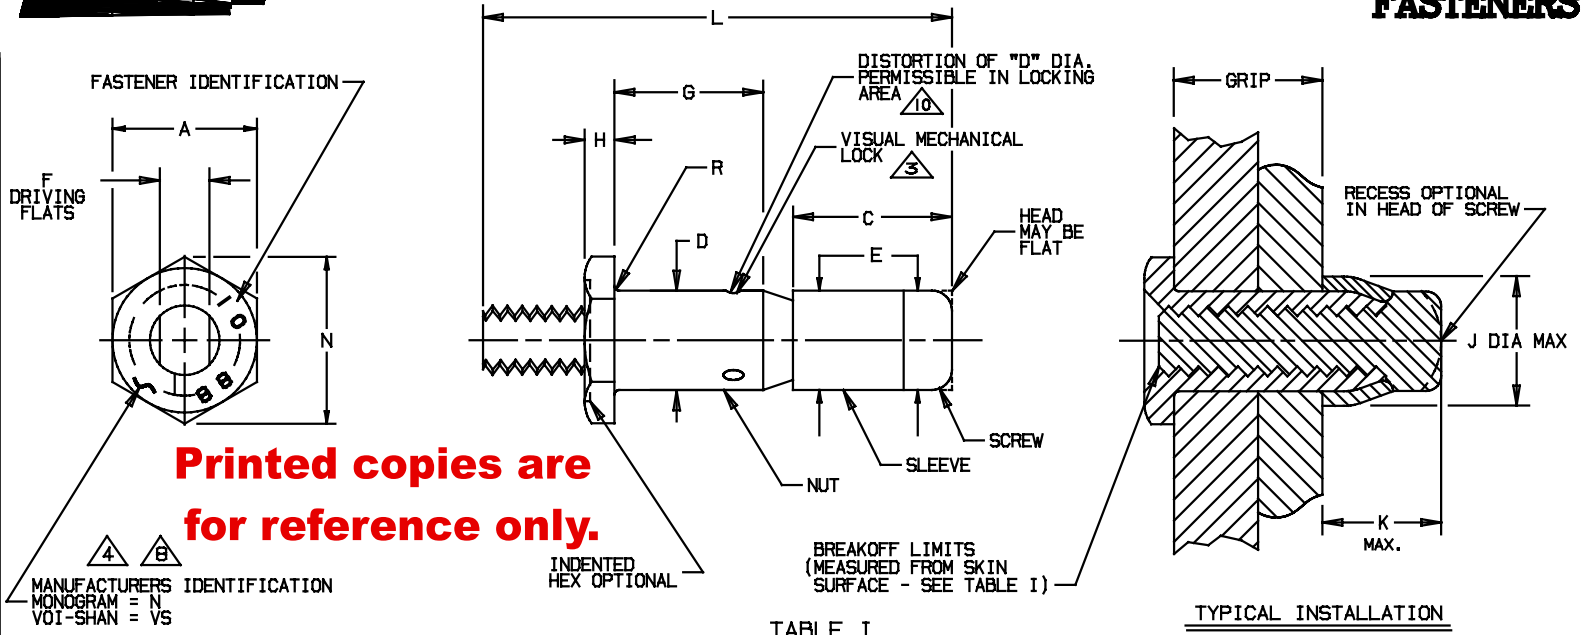

**Printed copies are for reference only.**

TABLE I

PART NUMBER	A	C MAX.	D DIA. $\triangle 2$		E MAX. $\triangle 1$	F DRIVING FLATS	H MAX.	J DIA. MAX.	K MAX.	N MIN.	R RAD.	BREAK-OFF LIMITS $\triangle 9$	PREVAILING TORQUE IN. LBS. MIN. $\triangle 9$	DOUBLE SHEAR STRENGTH LBS. MIN.	TENSILE STRENGTH LBS. MIN.
			WITHOUT COATING OR SOLID FILM LUBE	WITH COATING OR SOLID FILM LUBE											
PLT1088-5-(*)	.250 .244	.315	.1835 .1830	.1835 .1825	.1800	.086 .081	.096	.244	.300	.272	.020 .010	+.088 +.000	1.0	3150	900
PLT1088-6-(*)	.312 .305	.350	.2185 .2180	.2185 .2175	.2150	.104 .099	.113	.300	.333	.340	.025 .015	+.098 +.010	1.5	4600	1400
PLT1088-8-(*)	.375 .367	.395	.2795 .2790	.2795 .2785	.2760	.135 .130	.135	.384	.366	.409	.025 .015	+.135 +.047	2.5	7900	2100
PLT1088-10-(*)	.437 .429	.470	.3305 .3300	.3305 .3295	.3270	.152 .147	.160	.427	.447	.479	.030 .015	+.146 +.043	3.5	11350	3600
PLT1088-12-(*)	.500 .491	.555	.3935 .3930	.3935 .3925	.3900	.185 .180	.190	.516	.527	.548	.030 .015	+.152 +.049	4.0	16450	5600

(\*) SEE TABLE II FOR SECOND DASH NUMBER AND APPROVED CALLOUT.

TABLE II

SECOND DASH NUMBER	G GRIP $\blacktriangle$	GRIP RANGE $\triangle 6$ $\triangle 9$		L REF. PLT 1088					SECOND DASH NUMBER	G GRIP $\blacktriangle$	GRIP RANGE $\triangle 6$ $\triangle 9$		L REF. PLT 1088				
		MIN.	MAX.	-5-(*)	-6-(*)	-8-(*)	-10-(*)	-12-(*)			MIN.	MAX.	-5-(*)	-6-(*)	-8-(*)	-10-(*)	-12-(*)
-1	.093	.031	.093	.733	.874	-	-	-	-17	1.094	1.032	1.094	NOT AVAILABLE	1.874	1.944	2.096	2.242
-2	.156	.094	.156	.795	.936	1.006	1.158	-	-18	1.156	1.095	1.156	NOT AVAILABLE	1.936	2.006	2.158	2.304
-3	.219	.157	.219	.858	.999	1.069	1.221	1.367	-19	1.219	1.157	1.219	AVAILABLE	1.999	2.069	2.221	2.367
-4	.281	.220	.281	.920	1.061	1.131	1.283	1.429	-20	1.281	1.220	1.281	AVAILABLE	2.061	2.131	2.283	2.429
-5	.344	.282	.344	.983	1.124	1.194	1.346	1.492	-21	1.344	1.282	1.344	AVAILABLE	2.124	2.194	2.346	2.492
-6	.406	.345	.406	1.045	1.186	1.256	1.408	1.554	-22	1.406	1.345	1.406	AVAILABLE	2.186	2.256	2.408	2.554
-7	.469	.407	.469	1.108	1.249	1.319	1.471	1.617	-23	1.469	1.407	1.469	IN	2.249	2.319	2.471	2.617
-8	.531	.470	.531	1.170	1.311	1.381	1.533	1.679	-24	1.531	1.470	1.531	IN	2.311	2.381	2.533	2.679
-9	.594	.532	.594	1.233	1.374	1.444	1.596	1.742	-25	1.594	1.532	1.594	-5	2.374	2.444	2.596	2.742
-10	.656	.595	.656	1.295	1.436	1.506	1.658	1.804	-26	1.656	1.595	1.656	-5	2.436	2.506	2.658	2.804
-11	.719	.657	.719	1.358	1.499	1.569	1.721	1.867	-27	1.719	1.657	1.719	DIAMETER	2.499	2.569	2.721	2.867
-12	.781	.720	.781	1.420	1.561	1.631	1.783	1.929	-28	1.781	1.720	1.781	DIAMETER	2.561	2.631	2.783	2.929
-13	.844	.782	.844	1.483	1.624	1.694	1.846	1.992	-29	1.844	1.782	1.844	DIAMETER	2.624	2.694	2.846	2.992
-14	.906	.845	.906	1.545	1.686	1.756	1.908	2.054	-30	1.906	1.845	1.906	DIAMETER	2.686	2.756	2.908	3.054
-15	.969	.907	.969	1.608	1.749	1.819	1.971	2.117	-31	1.969	1.907	1.969	DIAMETER	2.749	2.819	2.971	3.117
-16	1.031	.970	1.031	1.670	1.811	1.881	2.033	2.179	-32	2.031	1.970	2.031	DIAMETER	2.811	2.881	3.033	3.179

$\blacktriangle$  "G" TOLERANCES: FOR -5 & -6 SIZES +.030/-0.010; FOR -8 & -10 SIZES +.040/-0.010; FOR -12 SIZE +.050/-0.010.

U.S. PATENT NO. 3643544, OTHER PATENTS PENDING.

**Fairchild**  
 CODE IDENT. NO.  
**5M902**

**MONOGRAM**  
 CODE IDENT. NO.  
**98524**

APPROVED DATE  
 08-15-84 ECN #3935

NOTICE: THIS DRAWING IS PART OF THE PROPRIETARY ARTICLE HEREIN DISCLOSED. OWNED BY MONOGRAM AEROSPACE FASTENERS. ANY PARTY BY ACCEPTING THIS DOCUMENT ASSUMES CUSTOMER THEREOF AND AGREES:  
 A. THE INFORMATION SET FORTH HEREIN IS GIVEN IN CONFIDENCE AND THIS DOCUMENT WILL NOT BE COPIED OR REPRODUCED IN WHOLE OR IN PART, NOR ITS CONTENTS REVEALED IN ANY MANNER TO ANY PERSON EXCEPT TO MEET THE PURPOSE FOR WHICH IT WAS DELIVERED.  
 B. WITHOUT THE WRITTEN CONSENT OF MONOGRAM AEROSPACE FASTENERS, THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN UNDER NO CIRCUMSTANCES WILL BE USED IN THE MANUFACTURE OR REPRODUCTION OF THE ARTICLE DISCLOSED, AND DELIVERY OF THIS DOCUMENT SHALL NOT CONSTITUTE ANY RIGHT OR LICENSE TO DO SO.

TITLE  
**VISU-LOK, FASTENER, BLIND INTERNALLY THREADED, EXTERNAL SLEEVE TITANIUM, 75 KSI SHEAR PROTRUDING HEX HEAD, SELF LOCKING GROUND SHANK, 1/8" OVERSIZE**

**STANDARD**  
**PLT1088**  
 SHEET 1 OF 2

REV. LETTER AND DATE  
 ECN # 3798  
 06-29-06



PROCUREMENT SPEC. : ESCBB-9, CLASS 2, EXCEPT AS NOTED HEREIN.


MATERIAL : NUT & SCREW : 6AL-4V TITANIUM PER AMS4928 OR AMS4967.  
 SLEEVE : CORROSION RESISTANT STEEL.

HEAT TREAT : NUT & SCREW : HEAT TREAT PER AMSL-H-81200, HYDROGEN 125 PPM  
 MAX. SLEEVE : AS REQUIRED FOR PERFORMANCE.

FINISH: " - " NUT & SCREW : NONE. (SEE ESCBB-4 FOR SPECIAL LUBRICANTS AND FINISHES).  
 SLEEVE : PASSIVATE PER AMS-QQ-P-35.  
 "L" NUT : ALUMINUM COAT PER NAS4006.  
 SLEEVE : PASSIVATE PER AMS-QQ-P-35 AND ALUMINUM COAT PER NAS4006.  
 SCREW : NONE.

LUBRICANT : NUT: DRY FILM LUBRICANT PER MIL-PRF-46010 TYPE I OR EVERLUBE #812 PER  
 MIL-PRF-81329. CETYL ALCOHOL PER MIL-L-87132, OPTIONAL.  
 SCREW & SLEEVE: DRY FILM LUBE PER MIL-PRF-46010 TYPE I OR EVERLUBE 812 PER  
 MIL-PRF-81329, PARAFFIN WAX AND/OR CETYL ALCOHOL PER  
 MIL-L-87132 MAY BE APPLIED AS REQUIRED FOR PERFORMANCE.

PART CODE  
& EXAMPLE :

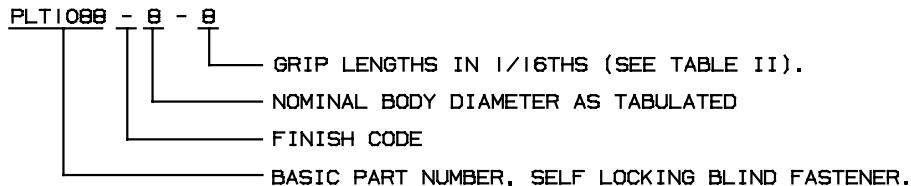

GENERAL NOTES :

1. OUTSIDE DIAMETER OF HEAD OF SCREW AND OUTSIDE DIAMETER OF SLEEVE SHALL NOT BE GREATER THAN MAXIMUM "E" DIAMETER.
- 2.) REMOVE ALL LOOSE OR HANGING BURRS.
3. LOCKING FEATURE CONSISTS OF THREE (3) INDENTATIONS LOCATED 120° APART ON THE PERIPHERY OF THE NUT COMPONENT AND APPROXIMATELY .040 ABOVE THE INTERSECTION OF THE NUT NOSE ANGLE AND O.D. (MEAN GRIP OF FASTENER).
4. MANUFACTURER'S IDENTIFICATION:  
 LETTER "N" DESIGNATES MONOGRAM AEROSPACE FASTENERS.  
 LETTERS "VS" DESIGNATE VOI-SHAN.
- 5.) HEAD MARKINGS ON NUT DEPRESSED .010 MAX. LOCATION OPTIONAL.
6. HALF-GRIP SIZES MAY BE ORDERED BY ADDING (.5) TO THE GRIP DASH NUMBER.  
 EXAMPLE: PLT 1088-6-4.5 INDICATES A NOMINAL GRIP LENGTH OF 4.5 SIXTEENTHS = .281.  
 THE GRIP RANGE FOR THESE HALF-GRIP SIZES WILL BE NOMINAL GRIP + .031/- .030.  
 THE BASIC "G" DIMENSION WILL BE NOMINAL GRIP + .031 AND THE OVERALL SCREW LENGTH "L" DIMENSION MAY VARY AT MANUFACTURER'S OPTION.
- 7.) THESE PARTS HAVE A CLOSE TOLERANCE (.0005 INCHES) GROUND SHANK AND ARE INTENDED FOR UP TO .0035 INCH DIAMETRICAL INTERFERENCE FIT APPLICATIONS.
8. STANDARD FINISHES AND LUBRICANTS ARE SHOWN ABOVE. REFER TO SPECIFICATION ESCBB-4 FOR SPECIAL FINISHES AND/OR LUBRICANTS, IF REQUIRED.
9. STANDARD GRIP LENGTHS ARE SHOWN IN TABLE II, SHORTER OR LONGER GRIPS THAN THOSE LISTED MAY BE AVAILABLE AS SPECIALS. ON GRIP LENGTHS SHORTER THAN THOSE LISTED, THE BREAKOFF LIMITS AND PREVAILING TORQUES SHOWN IN TABLE I DO NOT APPLY.
10. DISTORTION OF "D" DIAMETER SHALL NOT PREVENT INSERTION OF THE FASTENER INTO A RING GAUGE OF LENGTH EQUAL TO ONE DIAMETER AND DIAMETER EQUAL TO MAXIMUM "D" + .001" FORCE FOR INSERTION SHALL NOT EXCEED FIVE (5) POUNDS.
11. DIMENSIONS ARE EXCLUSIVE OF LUBRICATION.
12. MAXIMUM "D" DIAMETER MAY BE INCREASED BY .0002 TO ALLOW FOR SOLID FILM OR ALUMINUM COATING APPLICATION.

**Fairchild**

CODE IDENT. NO.

98524

**MONOGRAM**

CODE IDENT. NO.

98524

U.S. PATENT NO. 3643544, OTHER PATENTS PENDING.

APPROVED DATE

08-15-84 ECN #3935

NOTICE: THIS DRAWING IS PART OF THE PROPRIETARY ARTICLE HEREIN DISCLOSED. OWNED BY MONOGRAM AEROSPACE FASTENERS, ANY PARTY BY ACCEPTING THIS DOCUMENT ASSUMES CUSTODY THEREOF AND AGREES:  
 A. THE INFORMATION SET FORTH HEREIN IS GIVEN IN CONFIDENCE AND THIS DOCUMENT WILL NOT BE COPIED OR REPRODUCED IN WHOLE OR IN PART, NOR ITS CONTENTS REVEALED IN ANY MANNER TO ANY PERSON EXCEPT TO MEET THE PURPOSE FOR WHICH IT WAS DELIVERED.  
 B. WITHOUT THE WRITTEN CONSENT OF MONOGRAM AEROSPACE FASTENERS, THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN UNDER NO CIRCUMSTANCES WILL BE USED IN THE MANUFACTURE OR REPRODUCTION OF THE ARTICLE DISCLOSED, AND DELIVERY OF THIS DOCUMENT SHALL NOT CONSTITUTE ANY RIGHT OR LICENSE TO DO SO.

TITLE

**VISU-LOK, FASTENER, BLIND INTERNALLY THREADED, EXTERNAL SLEEVE TITANIUM, 75 KSI SHEAR PROTRUDING HEX HEAD, SELF LOCKING GROUND SHANK, 1/8" OVERSIZE**

**STANDARD**

PLT1088

SHEET 2 OF 2

REV. LETTER AND DATE

ECN # 3798  
 06-29-06